

EuroTrack 5200



SPECIFICATIONS

- Main chassis made of 400x200 box section on tracks. Hydraulic support legs.
- Beltfeeder 4,0 x 2,0 m, 6 m, with variable motor for infinite adjustment of the feed rate and radiocontrolled, hydraulic tilting grid, selfcleaning. Beltconveyor 3,6 m x 1000 mm.
- Beltconveyor to the screen, 11,85 m - 1000 mm.
- Screen SV-9, 5 x 1,5 m, two deck with air inflated rubber cushions, motor 11 kW, platforms and railings on both sides of the screen. Hydraulic angle adjustment.
- Two hydraulic folding beltconveyors for the oversize and middlesize fractions, 1 st 10,765 m - 650 mm and 1 st 9,765 m - 650 mm. One beltconveyor below the screen for the undersize fraction. 8,55 m - 1000 mm.
- Diesel generator John Deere.
- Electrical distribution centre with fusebox, starting switch gear and cut-outs for all motors in the plant.



 **MÖCKELN UK LTD**

EuroTrack 5200



Features



1. Remote control two way tipping grid
2. Double deck live head option
3. Stamford generator to power all electric drives
4. Fuel efficient John Deere engine

5. 650mm wide stockpile belt conveyors with chevron
6. Low shaft speed high throw 17x5 two deck screens with anti clog ball deck
7. Belt weigher fitted with modem for remote production management - keeps production high and downtime to a minimum
8. Internal electric motor & reduction box drum drive

PLC Control



PLC Control with sequential start overload protection giving continuous efficient screening

Working data

Contact
Tom McCullough
Mobile: 07774 774297


MÖCKELN UK LTD

Charnwood Edge
Syston Road, Cossington
Leicestershire LE7 4UZ

Tel: 0116 269 6363

Fax: 0116 269 5475

E-mail: sales@mockeln.co.uk

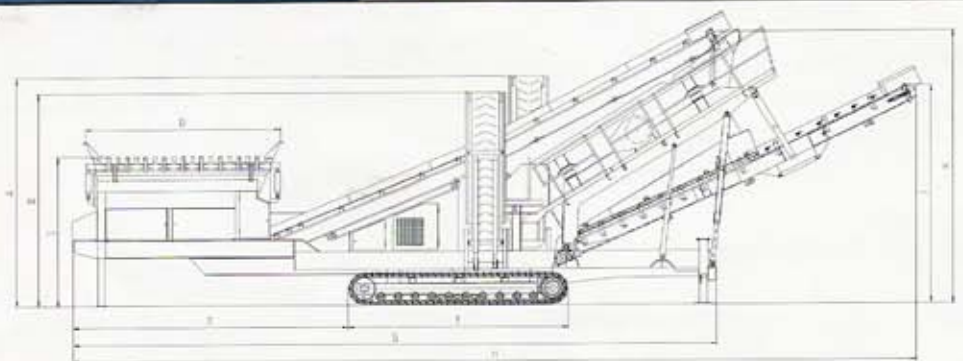

A	B	C	D	E	F	G	H	J	K
5225	4850	3400	4470	6300	5050	14750	19340	4950	6190
17' 2"	15' 11"	11' 2"	14' 8"	20' 8"	16' 7"	48' 5"	63' 5"	16' 3"	20' 4"